


Instructions on Connecting to eDVR Using Dynamic IP (DHCP)

After installing the software, please double-click on the eDVR Manager Monitor icon.




eDVR Manager
Monitor


1) Towards the right part of the screen in the white box area you will see 'My DVR', 'Local Area DVR', and 'WRS'. Right click on 'WRS' which is indicated in the picture below by the red arrow. After you right click on WRS select 'Add WRS'. The program will ask you for the Registration Server. Type in this IP address: 210.116.114.37 and then click 'OK'.

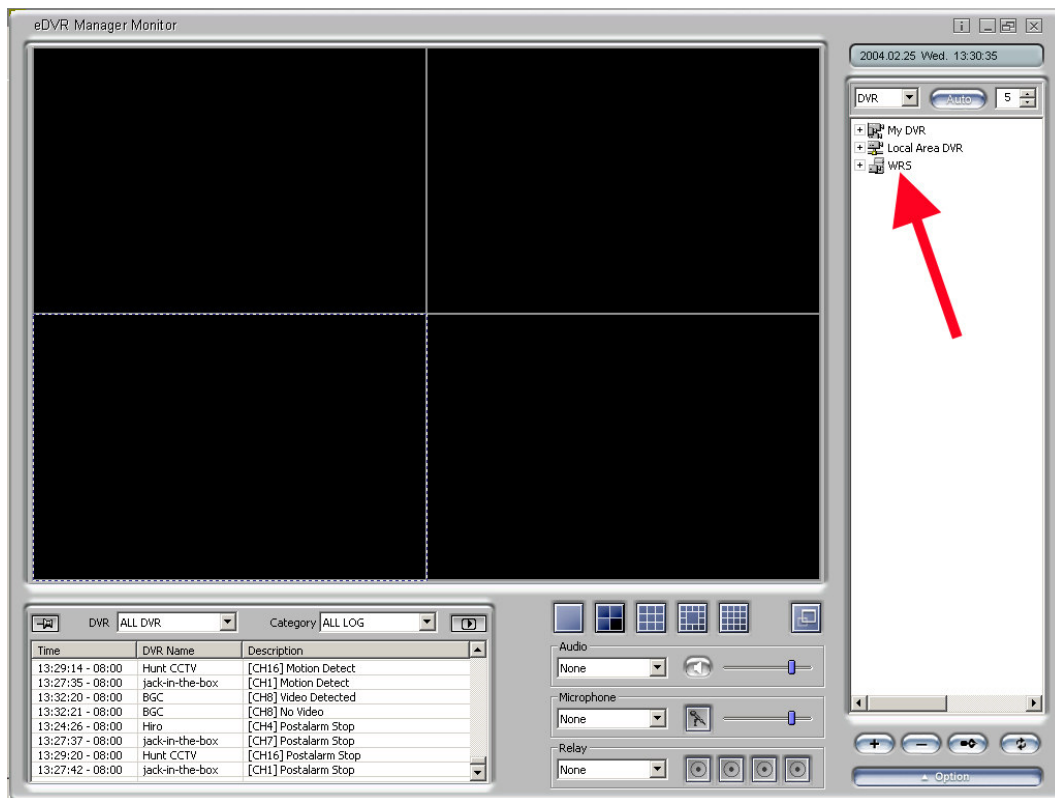


2) After you have entered the Registration Server your screen should look similar to the one below. Now right click on the registration folder (this is shown by the green arrow in the picture below) and select 'Add Group ID'. Please type in this Group ID: **bjmar**

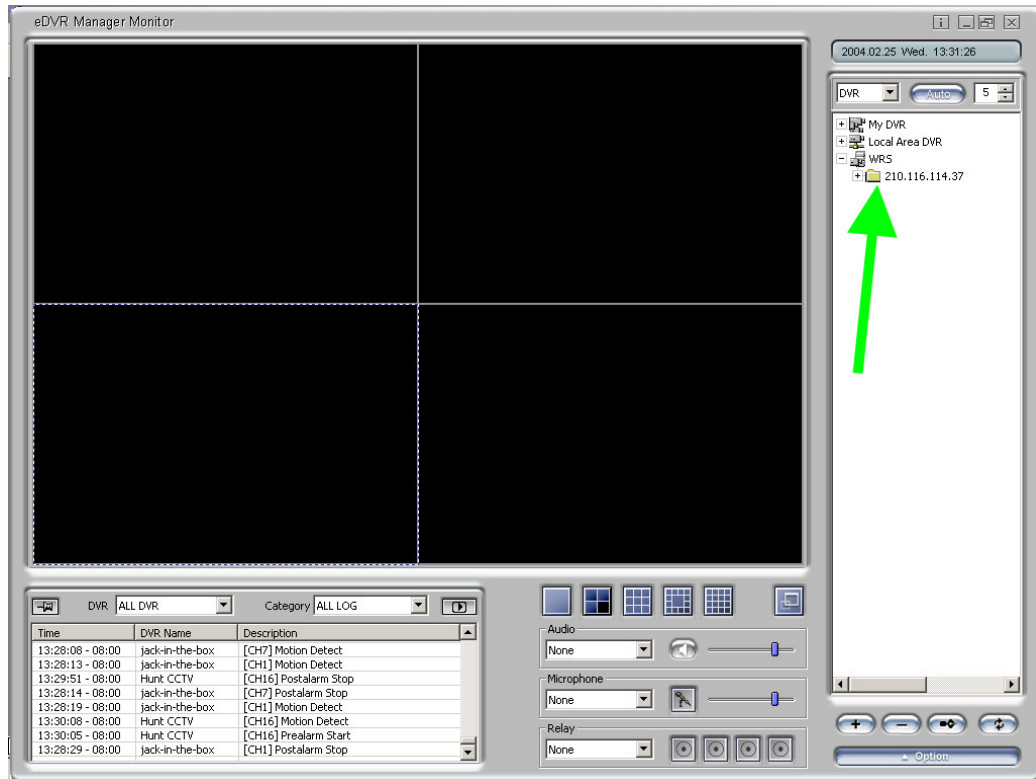


3) After you have entered the group ID your screen should look like the one below. If you did everything correctly you should see a folder labeled with your group ID and a camera icon should pop up underneath this folder. (this camera icon is shown below by the yellow arrow). If you do not see a camera icon pop up under the group ID folder please contact your installer. Please left click on this camera icon and drag this icon to 'My DVR'

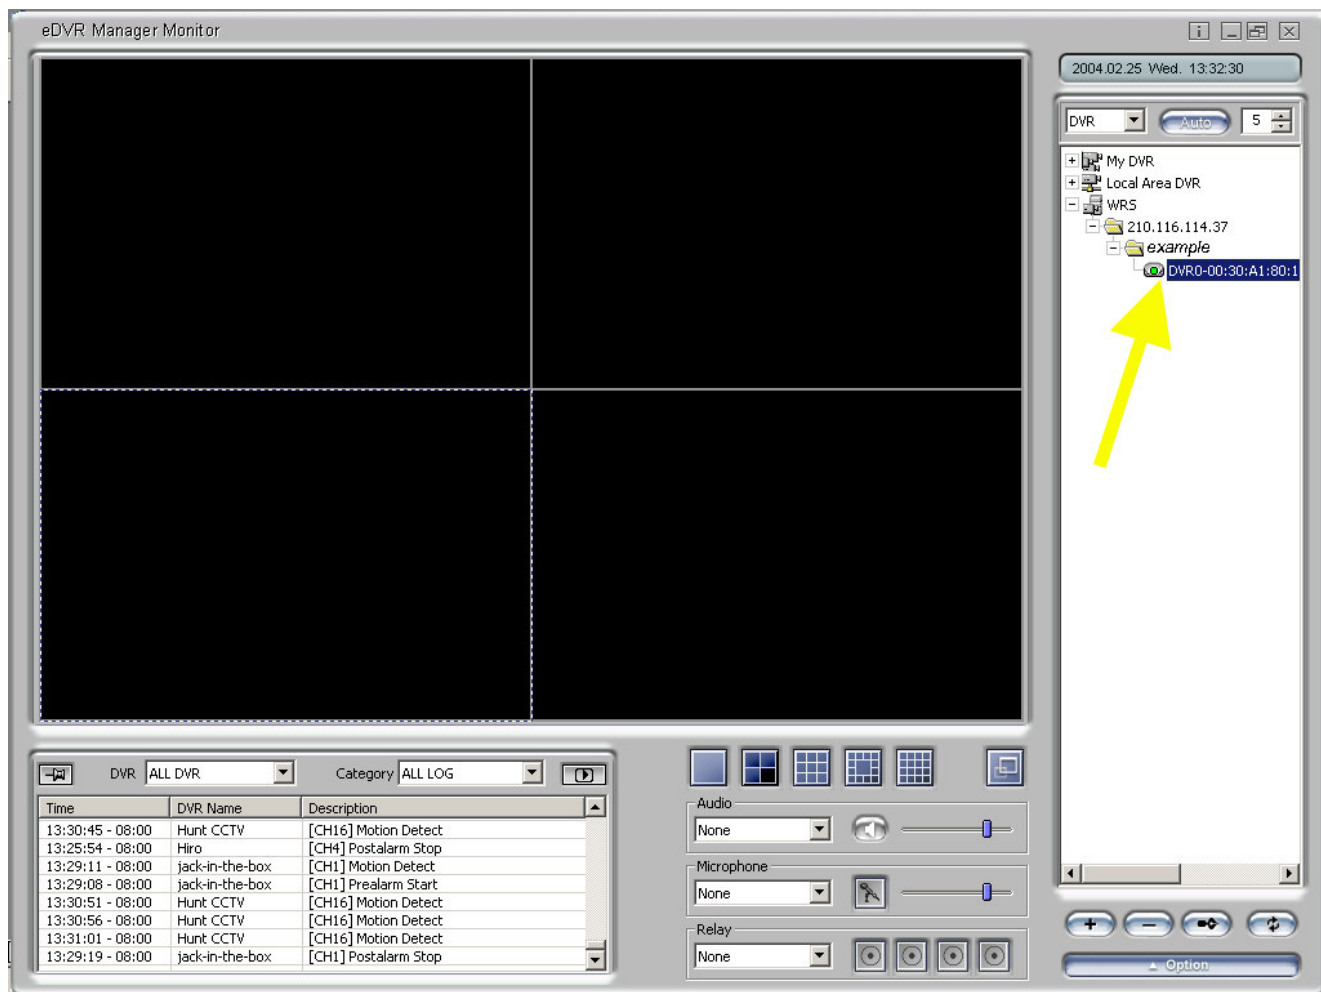


4) After you have dragged the camera icon to 'My DVR'. A screen will appear that looks similar to the one below. In the 'DVR Name' box you can enter anything you like, for example, the name or location of your business/residence. In the 'User ID' and 'Password' boxes please enter the information your installer gave you or this could be an ID and password that you have set up earlier. The ID & Password come default from the factory as 'admin'. After you have entered everything correctly please click 'OK'

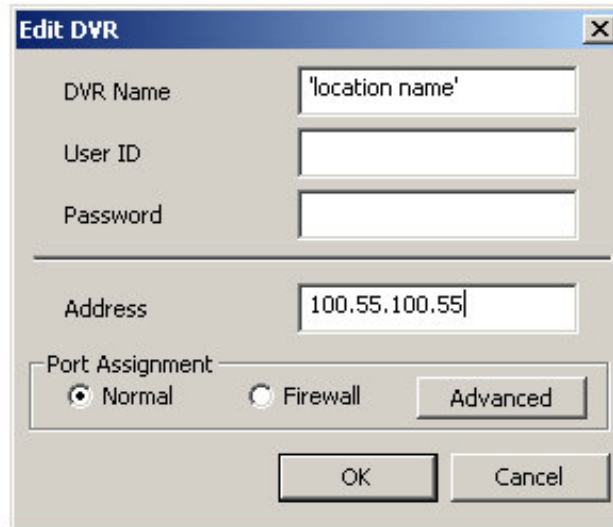

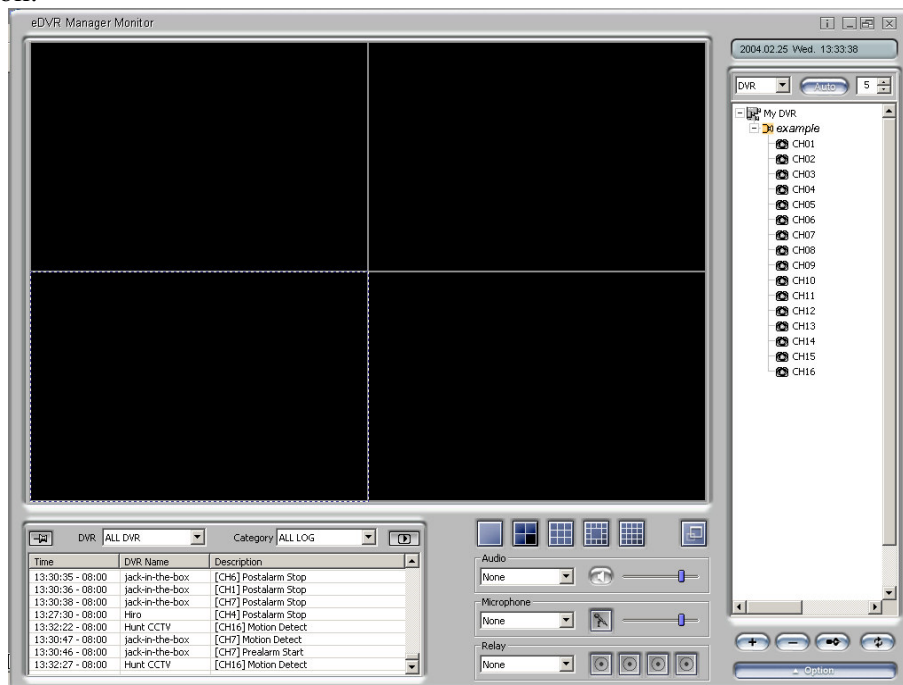

5) If you entered everything correctly up to this point you should see channels appear under your DVR name. This will look like the picture below. You can turn on these channels by clicking on 'CH01', 'CH02' and so on.



DVR status

 : Connected normally (Orange color)

 : Fail to connect (Gray color and X mark)

 : Fail to login (Gray color)

Viewing image



In order to view images, select a channel from DVR list.

If it is connected normally, image will appear. If not, error message will be indicated.

If it takes more time to receive images after connecting, "Loading..." message will show. If connection fails due to lack of network bandwidth, it will retry to connect.

 CH1 (Gray) means "before connecting",  CH1 (Blue) means "normal connection", and  CH1 (Red) means "fail to connect".

*** If you still cannot connect or are having problems please call your installer/salesperson.